


Inset drawers


Application

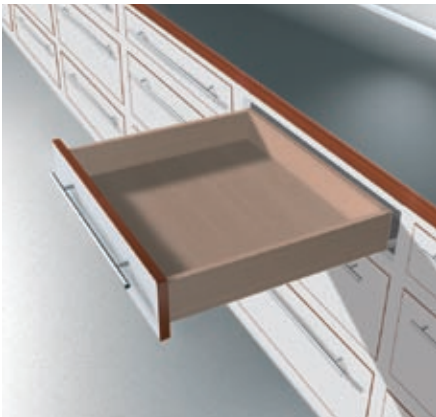



Description

- Requires increased setback of cabinet profile
- Frame applications require blocking-out behind face frame

Basic components

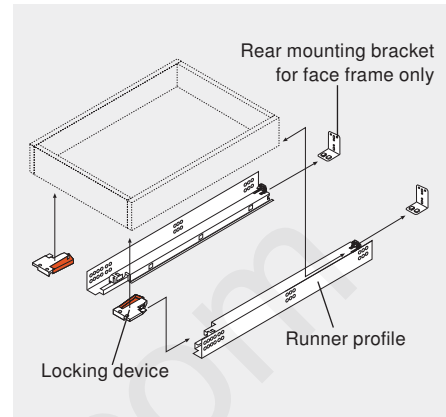

Applications

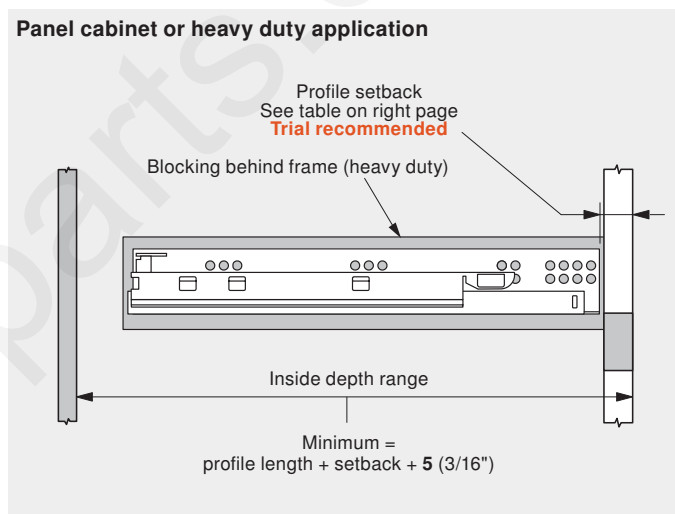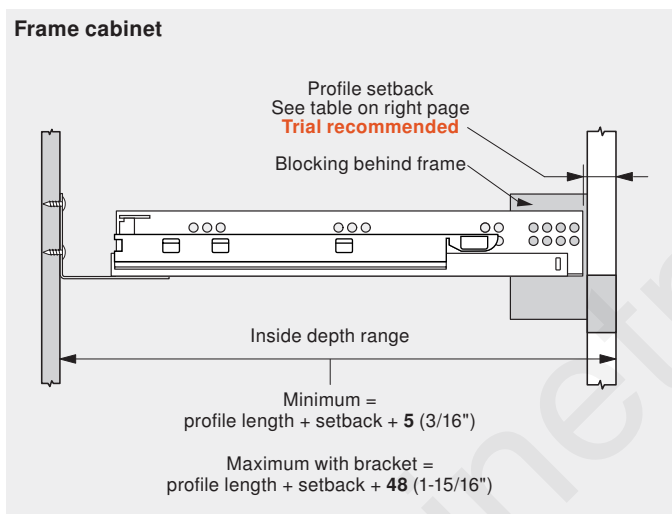

Components

Depth adjustable locking device (inset)

The depth adjustable locking device is especially designed for inset applications to allow installers to perfectly align drawer fronts.

- Offers 4mm (3/16") out adjustment, preset at 0mm
- Designed for 1/2" bottom recess
- Height adjustable +3 (1/8")
- For use with 562 / 568

Depth adjustable locking device (right)	T51.1700.PV R
Depth adjustable locking device (left)	T51.1700.PV L
Installation screws	612TH

Rear mounting bracket for frame cabinets

For use when installing TANDEM runners in face frame cabinets. Not necessary for panel cabinet installation.


- Two required per drawer
- Depth and side-to-side self-alignment
- Zinc-plated steel
- Not for use with 568

Non-handed bracket	295.3750
Installation screws	612TH



Installation

Mounting the TANDEM profile for inset application

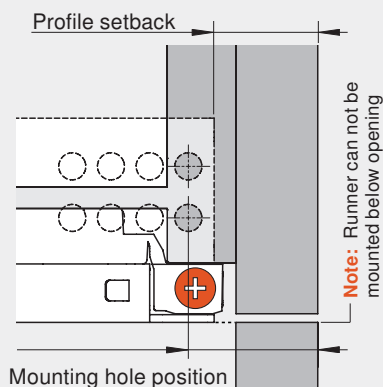

For mounting hole position, add 6mm to profile setback

562H Profile setback				
Sub front thickness	13 (1/2")	18	21	24
	16 (5/8")	21	24	27
	19 (3/4")	24	27	30
	16 (5/8")	19 (3/4")	22 (7/8")	
	Drawer front thickness			

Setbacks shown are for drawer fronts that are flush with the face frame. For recessed drawer fronts or to allow for adjustability, the setback must be increased.

562F Profile setback				
Sub front thickness	13 (1/2")	15	18	21
	16 (5/8")	18	21	24
	19 (3/4")	21	24	27
	16 (5/8")	19 (3/4")	22 (7/8")	
	Drawer front thickness			

After installation, adjust the locking device until the drawer front is in the desired position (out adjustment only).

Depth adjustment

Turning the adjustment screw gives up to 4mm (3/16") out adjustment.

