

TIP-ON BLUMOTION for LEGRABOX

TIP-ON BLUMOTION combines the best of both worlds – a mechanical, not electric, opening support system which lets you touch the drawer front to open the drawer – and a soft close.

 **blum**





Simple, tool-free assembly

The TIP-ON BLUMOTION unit can be assembled tool-free, as can all the other components.



Familiar boring positions

The usual LEGRABOX boring positions can be used for the TIP-ON BLUMOTION too.

Engineered excellence

TIP-ON BLUMOTION for LEGRABOX provides flexibility by offering the TIP-ON mechanism in three different strengths. Find your drawer runner length and select the appropriate unit and trigger. A synchronization rod is recommended for all cabinet widths greater than 350 millimeters for optimal function.



TIP-ON BLUMOTION for LEGRABOX cabinet profile



TIP-ON BLUMOTION units and triggers



S1 – Light gray (270 mm)



L3 – Dust gray (350 mm - 550 mm)



L5 – Black (450 mm - 600 mm)

Optimal opening and closing function

Can be used for nominal length in mm	Unit	part no.	< 22 lb	44 lb	66 lb	88 lb	110 lb	132 lb	155 lb
270	S1	T60L7140							
350-600	L3	T60L7540							
	L5	T60L7570							

LEGRABOX



TIP-ON BLUMOTION


Application




Features

- Enables LEGRABOX drawers to be opened with just a light touch of the drawer front
- TIP-ON BLUMOTION for LEGRABOX uses the same standard installation dimensions as for LEGRABOX.
- Fully mechanical motion
- Smooth running action
- Four-dimensional adjustment
- Dynamic load capacity of 88 lb and 155 lb

Space requirements

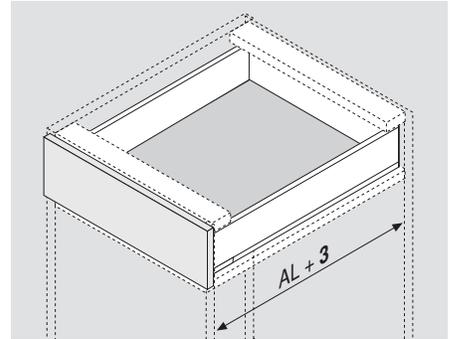

Components

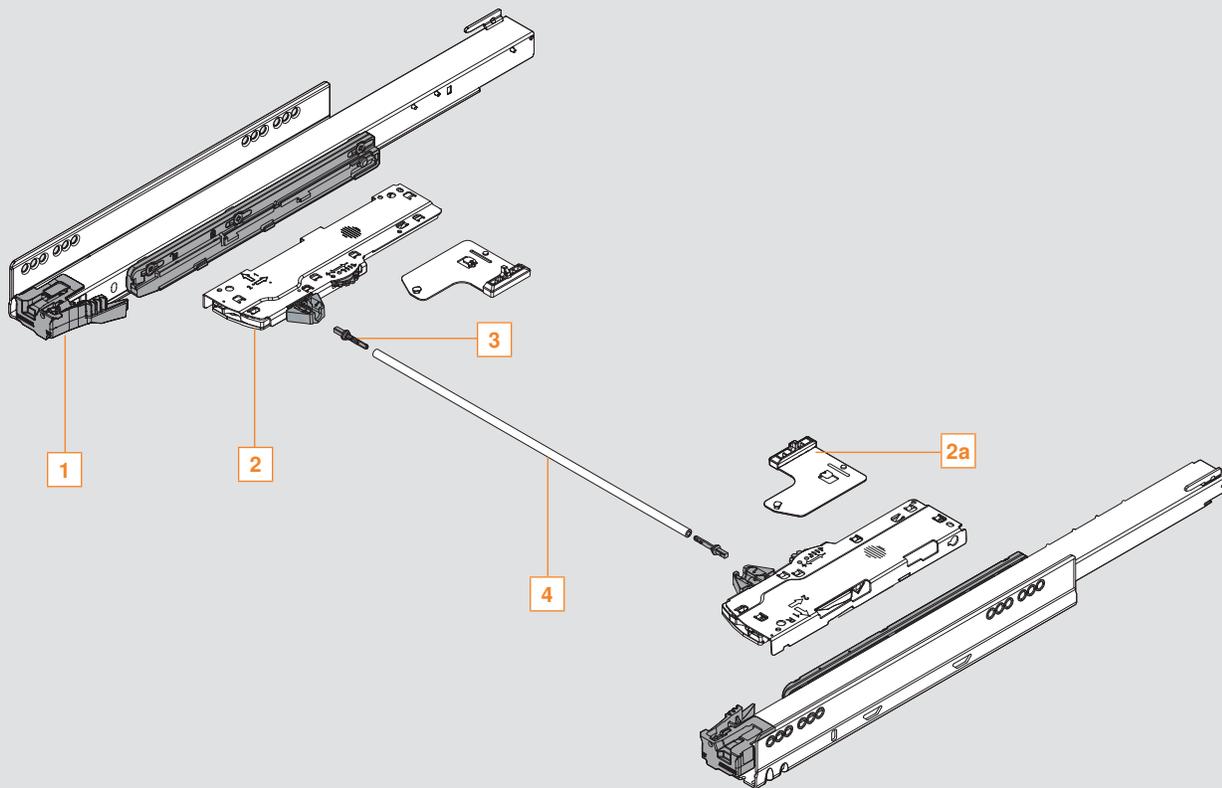

NOTE: Parts identified on right page

Required parts

LEGRABOX




TIP-ON BLUMOTION for LEGRABOX


Sets include:

- Left and right profile
- Left and right TIP-ON units and triggers

1 Cabinet profile

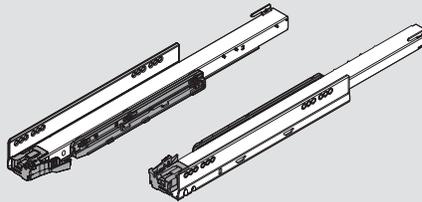

2 TIP-ON unit and trigger



Nominal length	Actual cabinet profile length	Cabinet profile		TIP-ON unit and trigger		
		88 lb	155 lb	S1	L3	L5
11"	270 (10-5/8")	750.2701M		T60L7140		
14"	350 (13-3/4")	750.3501M			T60L7540	
16"	400 (15-3/4")	750.4001M			T60L7540	
18"	450 (17-11/16")	750.4501M	753.4501M		T60L7540	T60L7570
20"	500 (19-11/16")	750.5001M	753.5001M		T60L7540	T60L7570
22"	550 (21-5/8")	750.5501M	753.5501M		T60L7540	T60L7570
24"	600 (23-5/8")		753.6001M			T60L7570
Installation wood screw		707N	707N			
Installation system screw		661.1300.HG	661.1300.HG			

TIP-ON BLUMOTION synchronization adapter

3



- To be used with the optional synchronization rod
- Two needed per application

Part no.

T60.000D

TIP-ON BLUMOTION synchronization rod

4




- Suitable for cabinet widths up to **1400** (55")
- Length **1118** (44-1/32") cut to size

Part no.

T60L1118W

NOTE: For optimal function, recommended for all cabinet widths greater than **350** (13-25/32")





TIP-ON BLUMOTION front gap template







- For creating a **2.5** (3/32") front gap

Part no.




65.5631.US

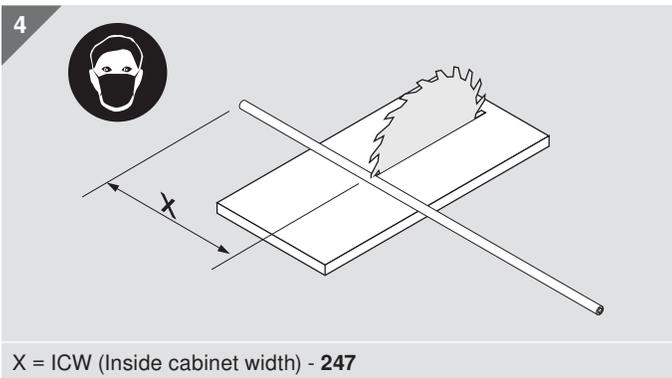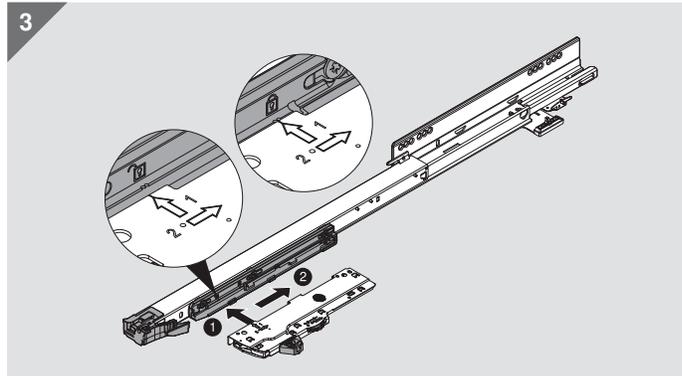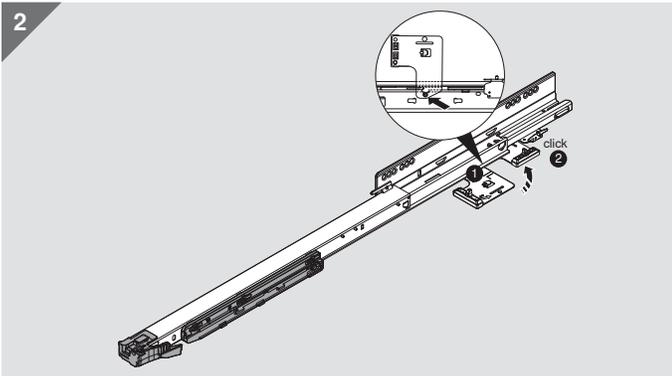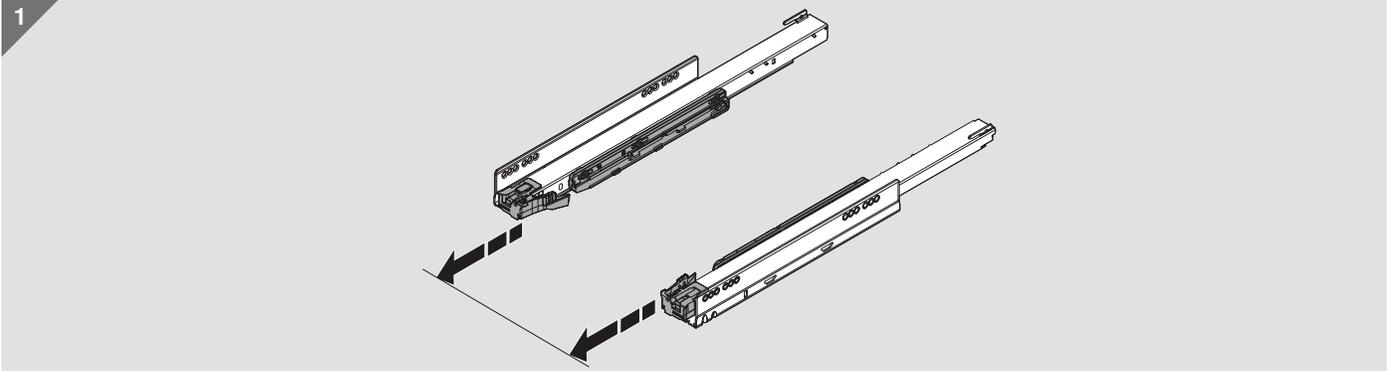

X = ICW (Inside cabinet width) - 247

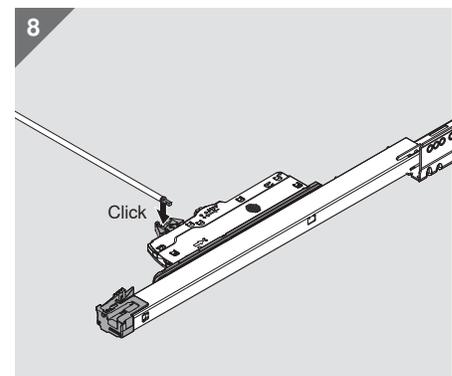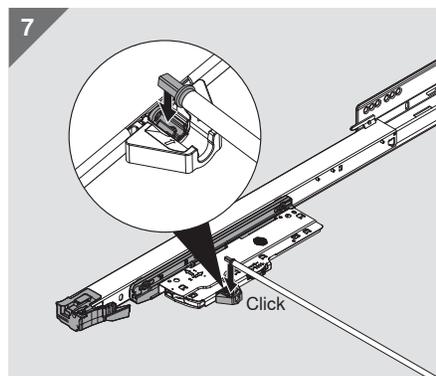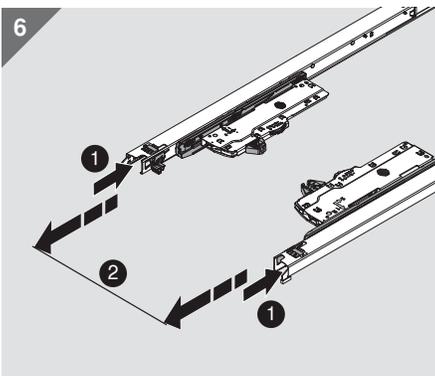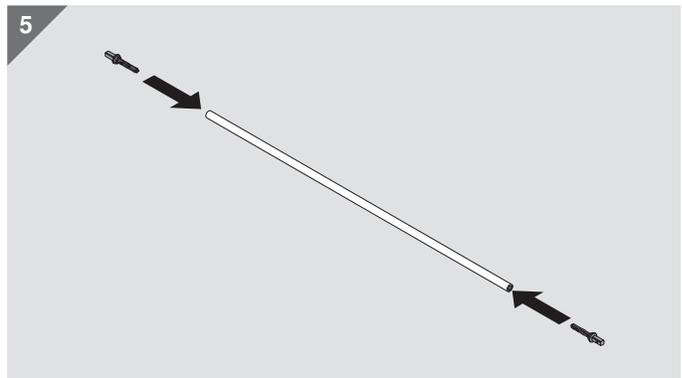

Depth adjustment

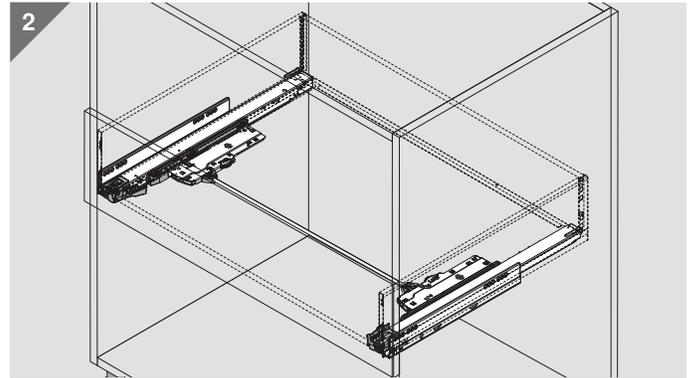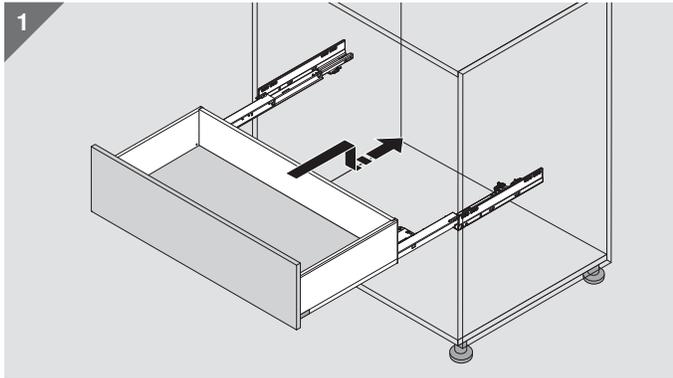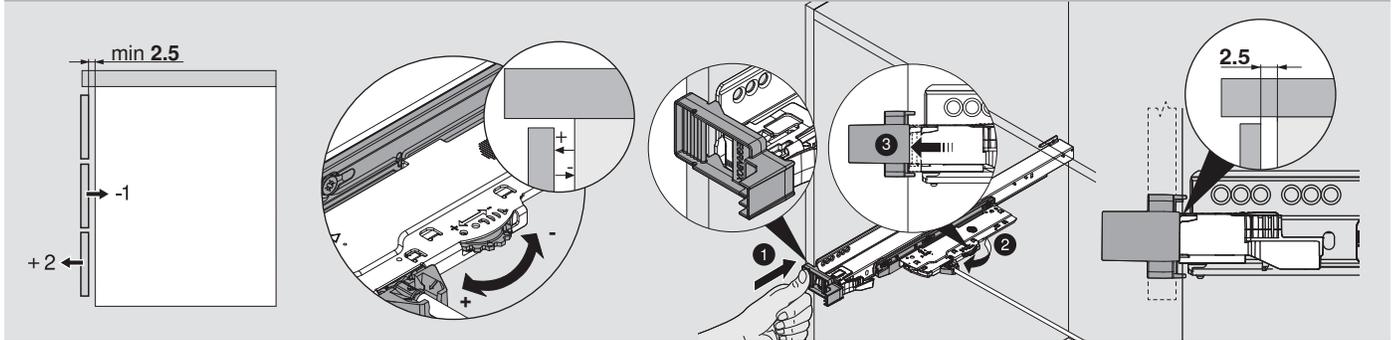

Removal

