


Bottom mount drawer




Application




Description

- Possible with any TANDEM runner
- Dynamic load capacity of up to 110 lb with TANDEM heavy duty runners


Basic components

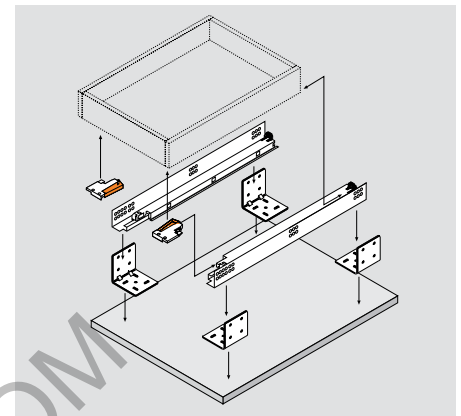


Drawer bottom mount installation

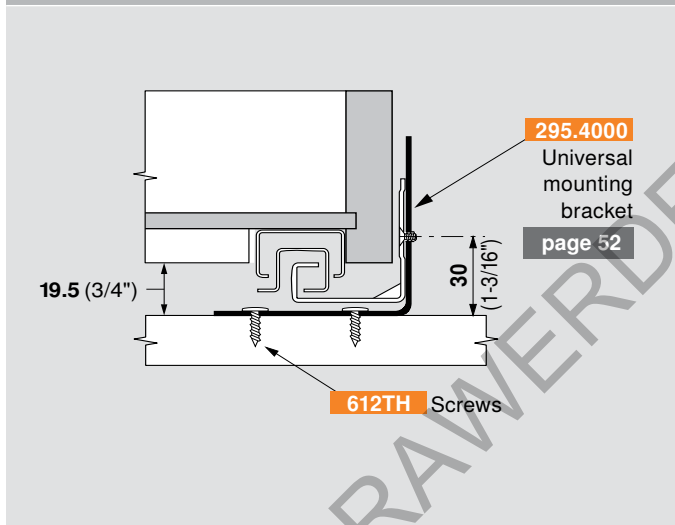

Roll-out tray bottom mount installation

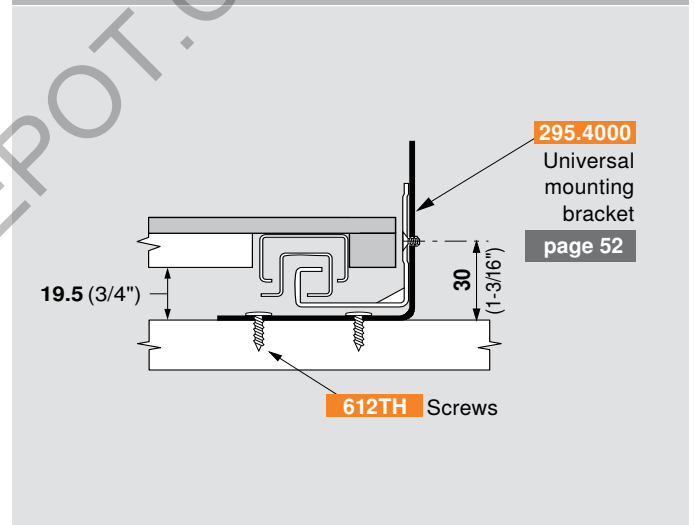

Standard locking device



- One right and one left required per drawer
- Minimum interior drawer width **121** (4-3/4")
- Height adjustable +3 (1/8")

NOTE: See page 48 for other options

Part no.

Right locking device

T51.1700.04 R

Left locking device

T51.1700.04 L

Installation

Installation screw

612TH

page 14

Dual mount application

